


# JT SHh 435-455W Monocrystalline Solar Module

120 Cells / Mono PERC / 1500V DC / 21.0% Maximum Efficiency



## KEY FEATURES

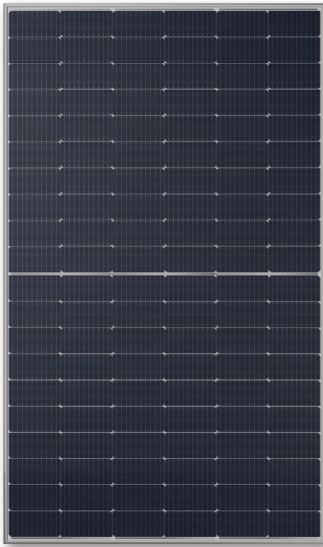

### Higher module conversion efficiency

Maximize limited space with high efficiency mono PERC cells  
Half-cell design, lower Rs loss, lower hot spot temperature



### Highly reliable due to stringent quality control

100% EL double inspection  
In-house testing goes well beyond certification requirements



### Excellent low light performance

Excellent low light performance on cloudy days  
mornings and evenings



### Certified to withstand the most challenging environment

2400 Pa wind load • 5400 Pa snow load • 25 mm hail stones at 82 km/h



### High system voltage compatible

Maximum 1500V DC system voltage saves total system cost



### IP68 junction box

High waterproof level for long term weather endurance

## QUALIFICATIONS & CERTIFICATES

- IEC 61215, IEC 61730, IEC 62941
- ISO 9001: Quality Management System
- ISO 14001: Environment Management System
- ISO 45001: Occupational Health and Safety

## JETION SOLAR

As a member of CNBM - a Fortune 500 company, Jetion Solar provides various product solutions, global EPC service and financing. Its standard and high-efficiency product offerings are among the most powerful and cost-effective in the industry. Till now, Jetion Solar has cumulatively more than 15 GW module shipment and 1 GW global EPC track records.


## WARRANTY

12  
years

Product  
Warranty

25  
years

Performance  
Warranty

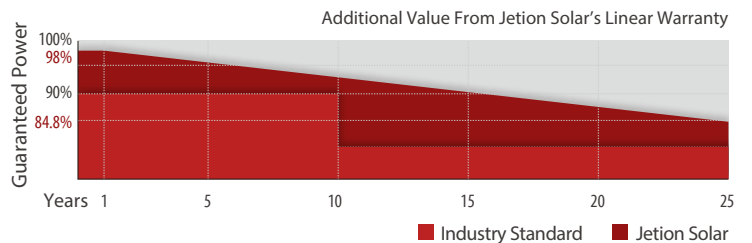


### Jetion Solar (China) Co., Ltd.

Add: 1011 Zhencheng Road, Jiangyin, Jiangsu Province, P.R. China 214443  
Tel: +86 (510) 8668 7300 400-8868-659  
E-mail: marketing@jetion.com.cn  
Web: www.jetionsolar.com




## IV CURVES


IV Curves of JT450SHh at different irradiances

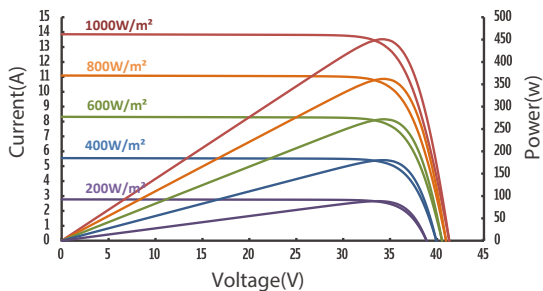

IV Curves of JT450SHh at different Temp

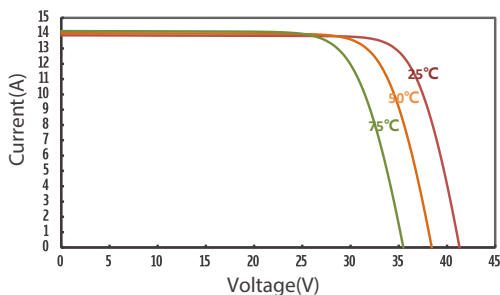

## DIMENSION

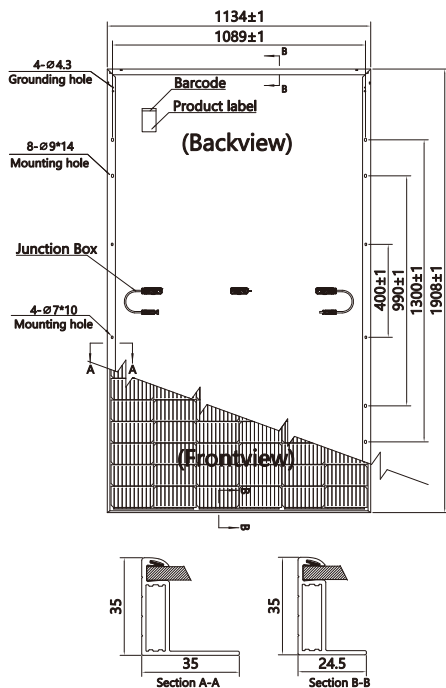

### Remarks

## ELECTRICAL DATA \*STC

TYPE (Tolerance: 0 - +5W)	JT435SHh	JT440SHh	JT445SHh	JT450SHh	JT455SHh
Maximum Power Pmax (W)	435	440	445	450	455
Maximum Power Voltage Vmp (V)	34.0	34.2	34.4	34.6	34.8
Maximum Power Current Imp (A)	12.80	12.87	12.94	13.01	13.08
Open Circuit Voltage Voc (V)	40.7	40.9	41.1	41.3	41.5
Short Circuit Current Isc (A)	13.65	13.72	13.79	13.86	13.93
Module Efficiency (%)	20.1%	20.3%	20.6%	20.8%	21.0%

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5

Measuring tolerance: ±3%

## ELECTRICAL DATA \*NMOT

Maximum Power Pmax (W)	324.85	328.76	332.67	336.58	341.32
Maximum Power Voltage Vmp (V)	31.8	32.0	32.2	32.4	32.6
Maximum Power Current Imp (A)	10.23	10.29	10.35	10.41	10.47
Open Circuit Voltage Voc (V)	38.2	38.4	38.6	38.8	39.0
Short Circuit Current Isc (A)	11.00	11.06	11.12	11.18	11.24

NMOT: Irradiance at 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s

## TEMPERATURE RATINGS

Temperature Coefficient of Isc (αIsc)	+0.048%/°C
Temperature Coefficient of Voc (βVoc)	-0.27%/°C
Temperature Coefficient of Pmax (γPmp)	-0.35%/°C
Normal Module Operating Temperature (NMOT)	41°C±3°C

## OPERATING PARAMETERS

Maximum System Voltage	1500V/DC(IEC)
Operating Temperature	-40°C~+85°C
Maximum Series Fuse	25A
Maximum Test Load, Push/Pull	5400Pa/2400Pa
Conductivity at Ground	≤ 0.1Ω
Safety Class	II
Resistance	≥ 100MΩ
Voc and Isc Tolerance	±2%/±3%

## MECHANICAL DATA

Solar Cell Type	Mono 91×182 mm(3.6×7.2 inches)
Number of Cells	120 [2 x (10 x 6)]
Module Dimensions	1908×1134×35 mm(75.1×44.6×1.4 inches)
Weight	24.5 kg(54 lb)
Front Cover	3.2 mm (0.13 inches), high transmission, AR coated tempered glass
Back Cover	White composite film
Frame	Silver, anodized aluminium alloy
J-Box	≥IP68
Cable	4.0 mm <sup>2</sup> solar cable, 300 mm(11.8 inches)
Number of diodes	3

## PACKAGING CONFIGURATION

Module per pallet	31 pieces
Module per 40'HQ container	24 pallets, 744 pieces

\*Installation instruction must be followed. See the installation manual or contact our technical service department for further information on approved installation.  
 \*The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, JETION Solar (China) Co., Ltd. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein. JETION Solar\_REV\_2023\_02\_EN